




XB - Conveyor for bulky applications

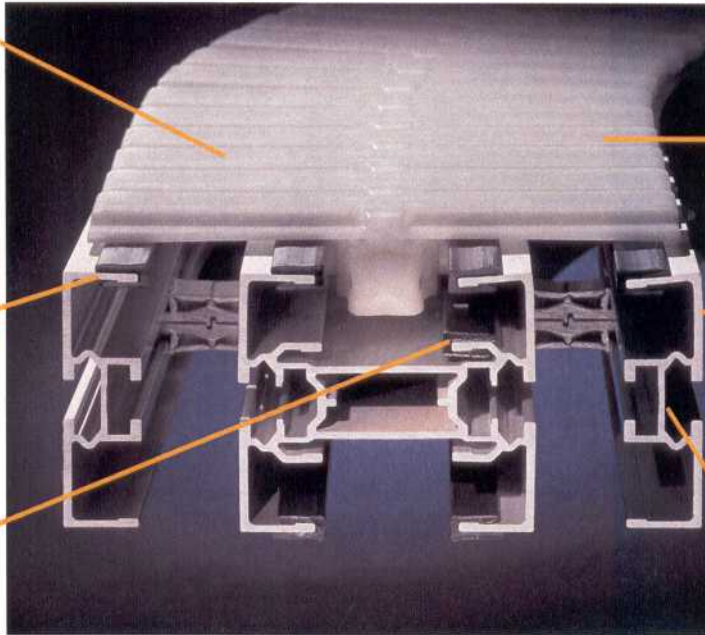

Design for safety: Tight chain design minimizes the risk of fingers getting pinched in the chain.

Thick slide rails: Tough polyethylene slide rails have large contact surfaces, both horizontally and vertically for long life.

Extra slide rail: Slide rails added for extra support around bends.

Friction top chain: Friction insert molded into the link increases the friction between goods and chain.

Rigid conveyor beam: The conveyor beam provides high stiffness and low deflection.

Double T-slots: Designed to accept connecting strips for easy sectioning and uninterrupted external slot for photo eyes or guide rail system.

Main Features

Installation with a minimum of interference to the present production process.

Standard 5 and 15 degree vertical bends accomplished easily.

Design allows loads up to 15 kg (30 lbs.) and speed up to 60m/min (200 ft/min).*

Items up to 400mm wide accepted.

Excellent for larger, bulky, lightweight items that require maximum support.

Standard 175 and 300mm widths available with custom widths available upon request.

Fixed or adjustable guide rail available to support your products.

Full line of structural and automation components available to support your application.

*Dependent on product and application

The FlexLink XB Conveyor features a wide chain with the ability to transport odd shaped bundles or large awkward items that require extra support.

Examples of products Conveyed:

Packages of Diapers
Bags of Napkins
Bundles of Toilet Tissue
Corrugated Cartons
Packages of Paper Towels
Books
Cases of Laundry Detergent
Cases of Tampons

First Choice for Easier Automation