




# XW - Wide Conveyor for Package Handling

Wide-chain stability for large, soft or bulky products.

Chain is available in three widths - 313, 465 and 617 mm.

Fine mesh pattern minimizes risk of jamming or tearing goods, improves operator safety.

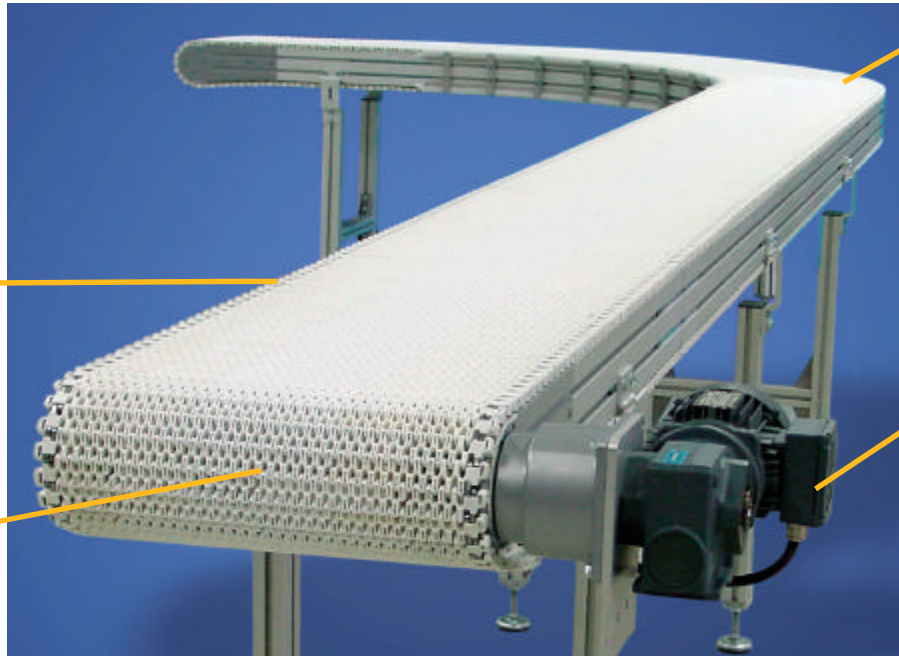

Side-flexing chain capable of making 30, 45 or 90 degree turns

Uses standard SEW motor, 50 or 60 Hz available.

FlexLink XW conveyors are delivered as pre-assembled modules per your specifications.

When production requirements call for horizontal transport between case packers, cartoners, palletizers, in-case fillers, shrink / stretch wrappers or bulk packers, the XW conveyor is a perfect choice.

	Conveyor width	Min. total length	Max. total length
Straight conveyor	313/465/617	1300 mm	20000 mm
L-shaped conveyor	313	3000 mm	10000 mm
L-shaped conveyor	465	4450 mm	10000 mm
L-shaped conveyor	617	5950 mm	10000 mm

Standard speeds (50 Hz)	5, 12, 21, 32, 46 m/min
Standard speeds (60 Hz)	7, 11, 22, 34, 40 m/min
Load Capacity	1500 N at speeds above



## First Choice for Easier Automation